

1, Disassemble the front panel.



Remove the two screws marked in red on the bottom of the unit.



Once the screws are removed, pull out DAC-10 front panel gently to reveal the cables inside. Disconnect the cables to remove the front panel.

2, Disassemble the top cover.




Please remove the 4 screws marked in red from the back panel.



Please remove the 4 screws marked in red on the bottom of the unit. Once the screws from the rear panel and bottom unit are removed, gently pull the top cover forward to remove the top cover completely.

3. Connecting cables

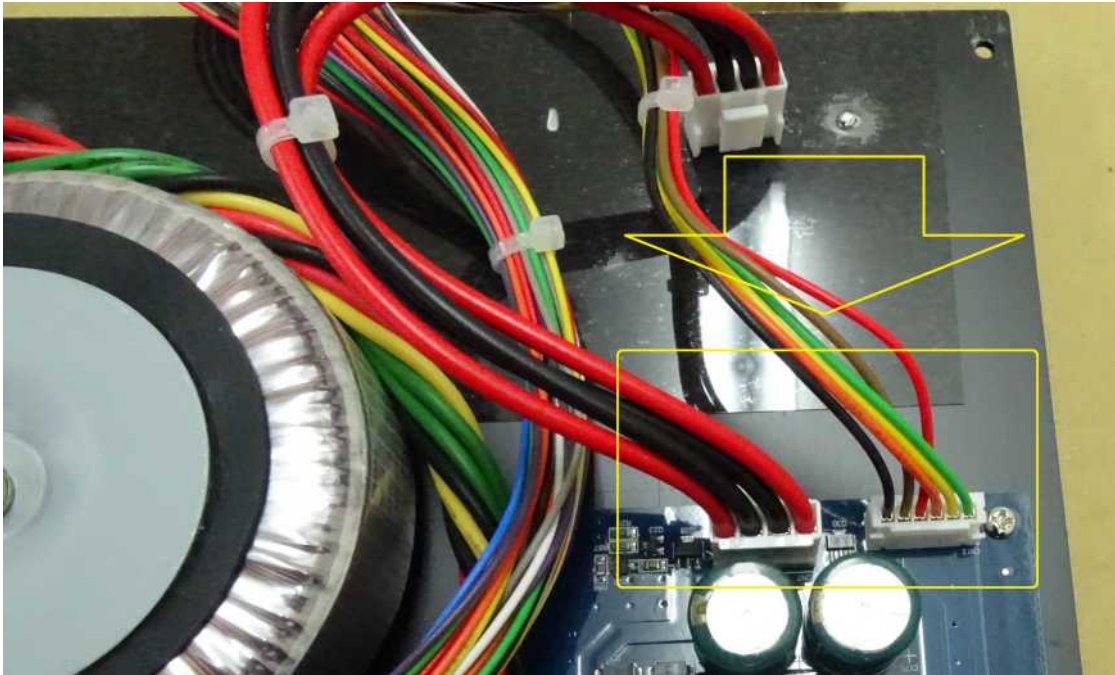


Please connected the two cables provided with the DAC-10H front panel to the main DAC board.

4. Assemble the top cover.



Gently slide back the top cover and install the 4 screws back to secure the cover.

5, Assemble the front panel.

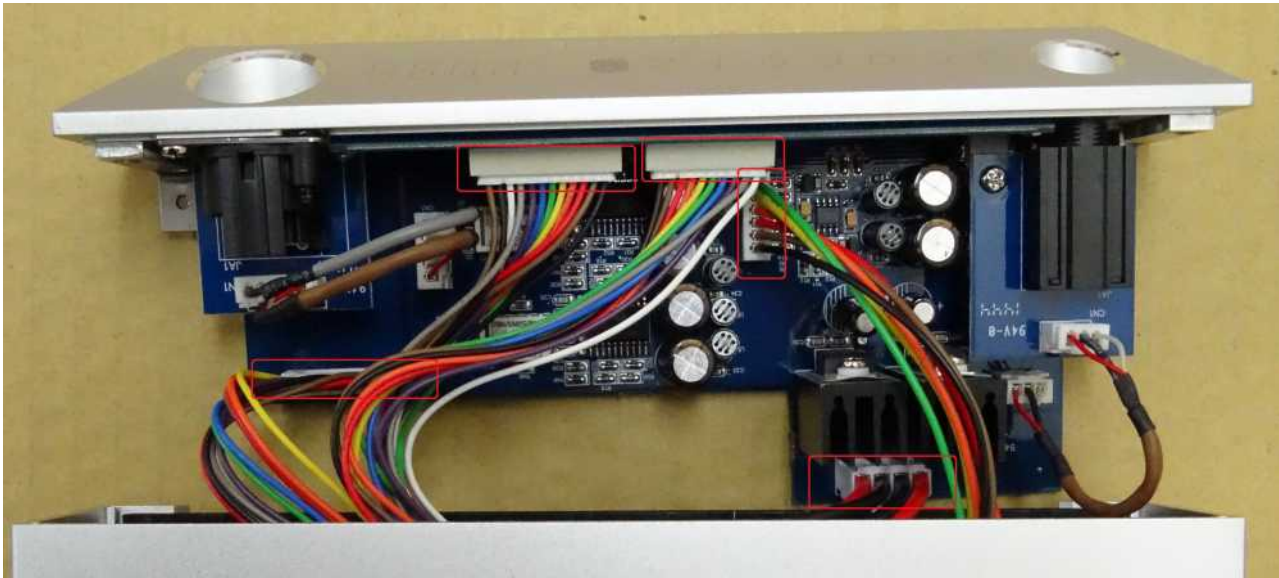

Please connect all cables back its corresponding locations.



Gently slide back the front panel and install the 2 screws to secure the front panel.



Install the 4 screws to fix the top cover and the rear panel to complete assembly.